

## Pedestrian sliding door automations

# K140


MAX. CAPACITY 140 KG

# K200


MAX. CAPACITY 200 KG



High quality materials and innovative technical solutions combined in a compact and strong door opener.



High quality materials and innovative technical solutions combined in a compact and strong door opener.



High quality materials and innovative technical solutions combined in a compact and strong door opener.



TOPP door automations, models K140 and K200, for pedestrian sliding doors, max. load 140 kg (K140), 200 kg (K200), intensive duty devices, with electronic board with microprocessor of latest generation that allows the motion selfadjustment according to the weight and dimensions of the panels.

Built-in safety functions with thrust force control and obstruction detection system that automatically reverses the operation when an obstacle in the doorway is detected. Motor with encoder for the automatic reading of stroke, position and slowdown of the panels. Basic parameter setting on the electronic board and advanced setting for user and installer via digital selector.

Selection of operating modes via manual selector, digital selector or wireless selector. CE certified automation in compliance with the EN16005 and Australian Standards AS5007 - 2007.



## TECHNICAL SPECIFICATIONS

SPECIFICATIONS	K140		K200	
Power supply	230V ~ 50/60 Hz		230V ~ 50/60 Hz	
Peripheral power output	24V - 500mA max		24V - 500mA max	
Absorption	0,32 A		0,41 A	
Absorbed power	70W		90W	
Durability	1.000.000 cycles		2.000.000 cycles	
Type of use	semi-intensive		intensive	
Opening/closing speed	adjustable 100 ÷ 800 mm/s		adjustable 100 ÷ 800 mm/s	
Opening/closing approaching speed	adjustable 1 ÷ 50		adjustable 1 ÷ 50	
Opening/closing acceleration	adjustable 1 ÷ 12		adjustable 1 ÷ 12	
Automatic closing time	adjustable 0 ÷ 60 s		adjustable 0 ÷ 60 s	
No. of door panels	1 PANEL	2 PANELS	1 PANEL	2 PANELS
Maximum capacity	140 kg	70 + 70 kg	140 kg	100 + 100 kg
Size of opening	800 ÷ 2800 mm	1000 ÷ 2800 mm	800 ÷ 2800 mm	1000 ÷ 2800 mm



**Life Time Warranty  
On Workmanship**




**\*24 Months on Equipment  
Supplied and installed**


\*Terms and conditions apply



**K140**

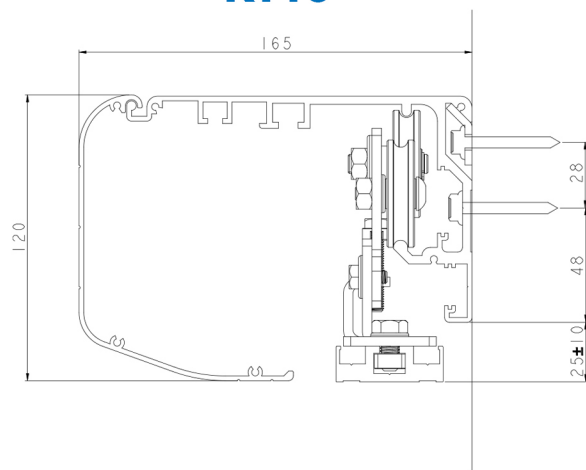

**K200**

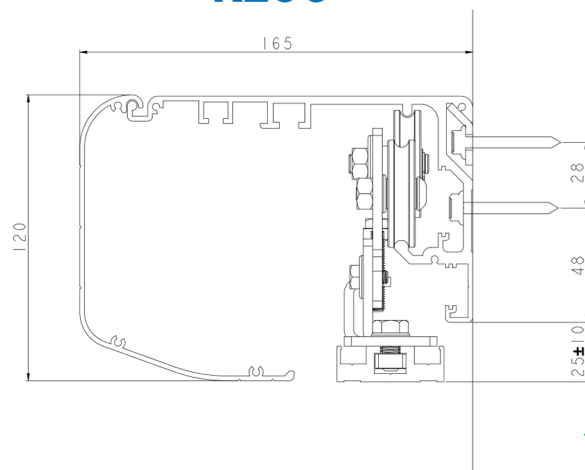


## PANEL ADAPTER KITS FOR LINEAR SLIDING DOOR OPERATORS

### T10 - FOR FRAMED PANELS

Adapter kit includes:

- ☑ Adapter
- ☑ Track
- ☑ Floor guide
- ☑ Accessories

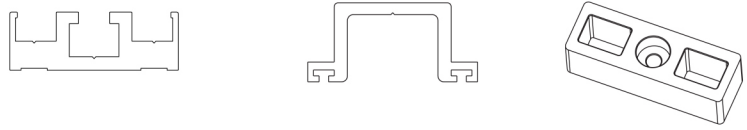

### A10/A12- FOR GLASS PANELS

Adapter kit includes:



- ☑ Adapter for 10/12mm glass panels
- ☑ Floor guide
- ☑ End-caps
- ☑ Accessories




### S10 - FOR PANELS WITH BREAK-OUT

Adapter kit includes:


- ☑ Adapter
- ☑ Track
- ☑ Runner on floor
- ☑ Simple break-out system
- ☑ Accessories

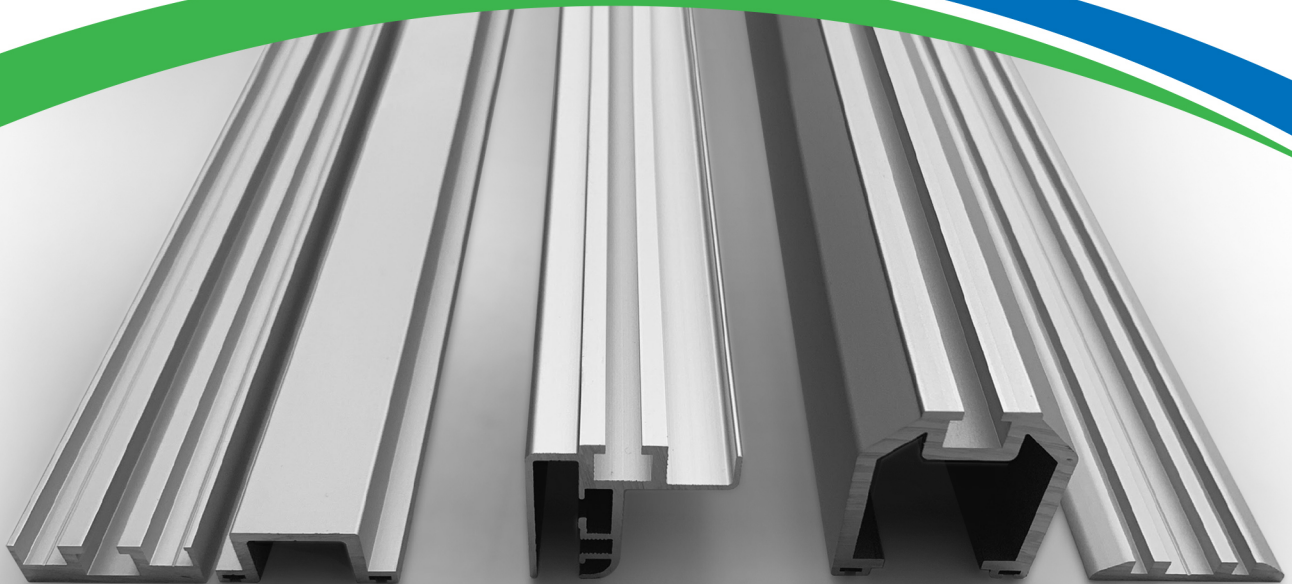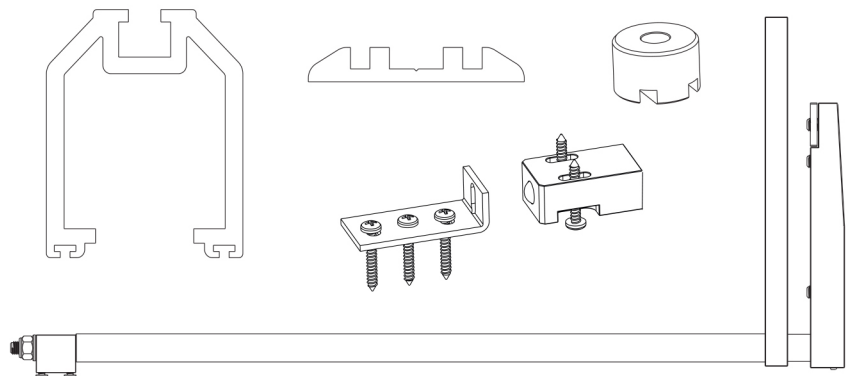


## K140 - K200 DIMENSIONS

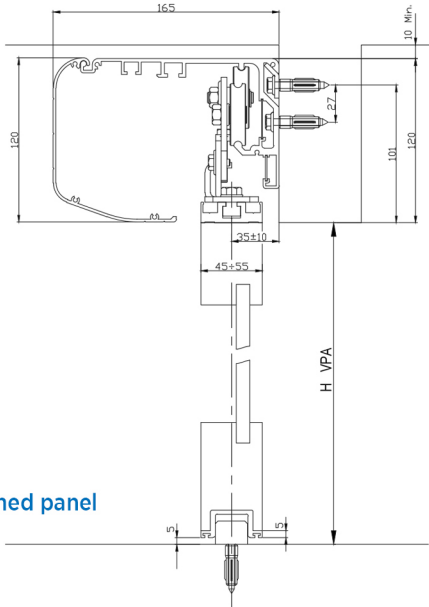


**T10**  
with framed panel

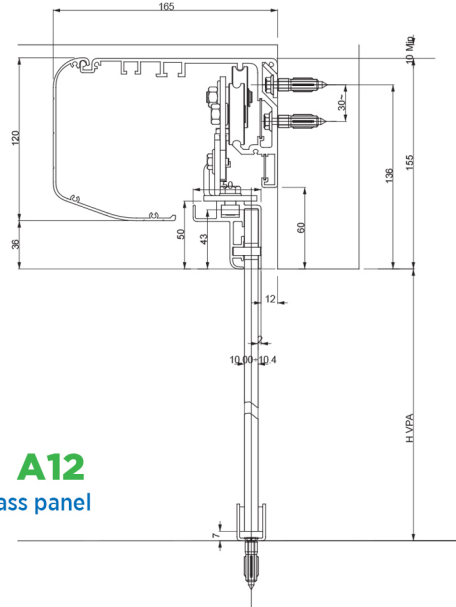


**A10 A12**  
with glass panel

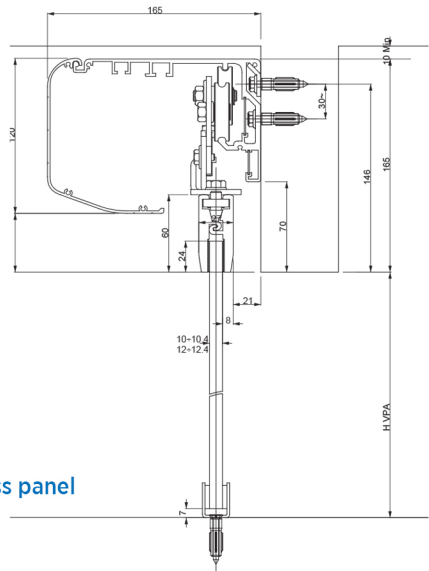


**T10**  
with glass panel

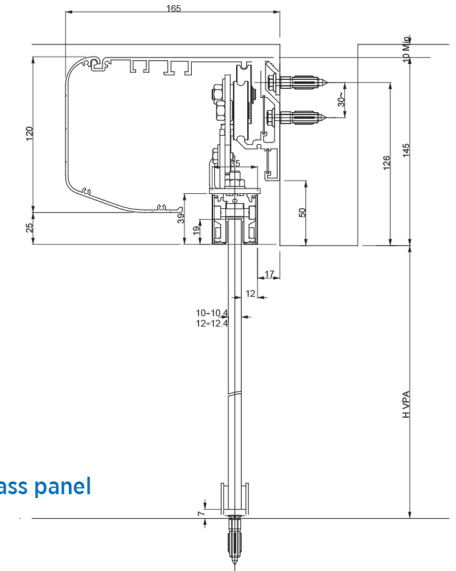

**G38**  
with glass panel

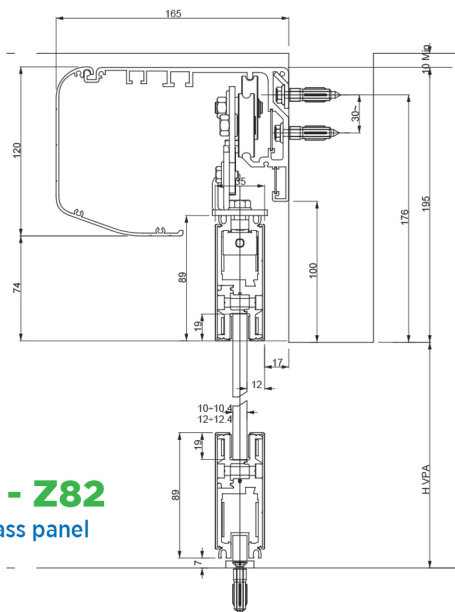

**G82 - Z82**  
with glass panel

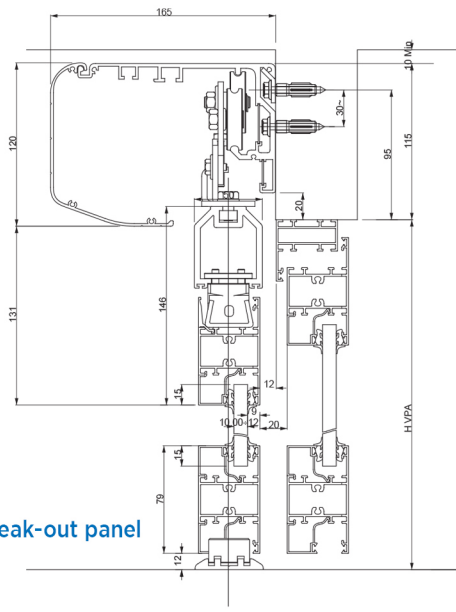

**S10**  
with break-out panel