



Telescopic pedestrian sliding door automations

K200T K280T

MAX. CAPACITY 200 KG

MAX. CAPACITY 280 KG

TOPP door automations, models K200T and K280T, for telescopic pedestrian sliding doors, max. load 200 kg (K200T), 280 kg (K280T), intensive duty devices, with electronic board with microprocessor of latest generation that allows the motion selfadjustment according to the weight and dimensions of the panels.


Built-in safety functions with thrust force control and obstruction detection system that automatically reverses the operation when an obstacle in the doorway is detected. Motor with encoder for the automatic reading of stroke, position and slowdown of the panels. Basic parameter setting on the electronic board and advanced setting for user and installer via digital selector.

Selection of operating modes via manual selector, digital selector or wireless selector. K280TR redundant version for escape and emergency route solutions available on request.

CE certified automation in compliance with the EN16005 and Australian Standards AS5007 - 2007.



High quality materials and innovative technical solutions combined in a compact and small door opener.



Electronic board with microprocessor, in compliance with the EN16005 standard, providing direct basic programming via buttons or advanced programming via digital selector.



Top solidity, reliability and resistance due to high quality materials, resulting in the capacity to withstand any stress and strain.

TECHNICAL SPECIFICATIONS

SPECIFICATIONS	K200T		K280T	
Power supply	230V ~ 50/60 Hz		230V ~ 50/60 Hz	
Peripheral power output:	24V - 500mA max		24V - 500mA max	
Absorption	0,32 A		0,41 A	
Absorbed power	70W		90W	
Durability	1.000.000 cycles		2.000.000 cycles	
Type of use	semi-intensive		intensive	
Opening/closing speed	adjustable 100 ÷ 800 mm/s		adjustable 100 ÷ 800 mm/s	
Opening/closing approaching speed	adjustable 1 ÷ 50		adjustable 1 ÷ 50	
Opening/closing acceleration	adjustable 1 ÷ 12		adjustable 1 ÷ 12	
Automatic closing time	adjustable 0 ÷ 60 s		adjustable 0 ÷ 60 s	
No. of door panels	2 PANEL	4 PANELS	2 PANEL	4 PANELS
Maximum capacity	2 x 100 kg	4 x 50 kg	2 x 140 kg	4 x 70 kg
Size of opening	900 ÷ 4200 mm	1800 ÷ 4200 mm	900 ÷ 4200 mm	1800 ÷ 4200 mm



**Life Time Warranty
On Workmanship**





***24 Months on Equipment
Supplied and installed**

*Terms and conditions apply



K200T

K280T

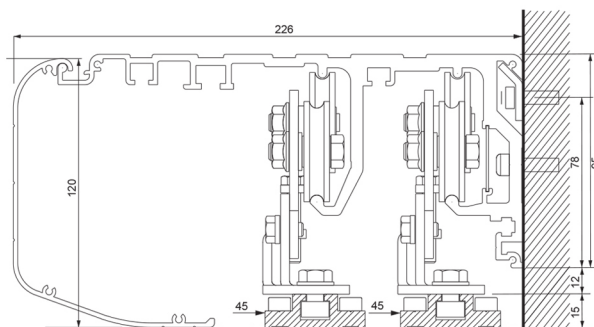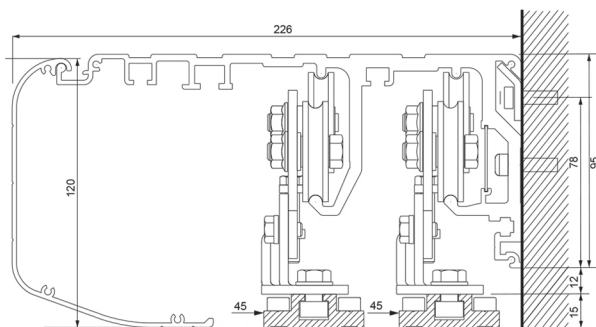


PANEL ADAPTER KITS FOR TELESCOPIC AUTOMATIONS K200T - K280T - K280TR

T10 - FOR FRAMED PANELS

Adapter kit includes:


- ☑ Adapter
- ☑ Runner on floor
- ☑ Accessories

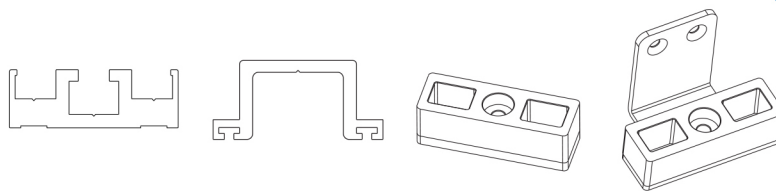

G60 - FOR GLASS PANELS

Adapter kit includes:


- ☑ Clamp adapter for 10/12mm glass panels
- ☑ Guide for fast panel
- ☑ Floor guide for slow panel
- ☑ Accessories

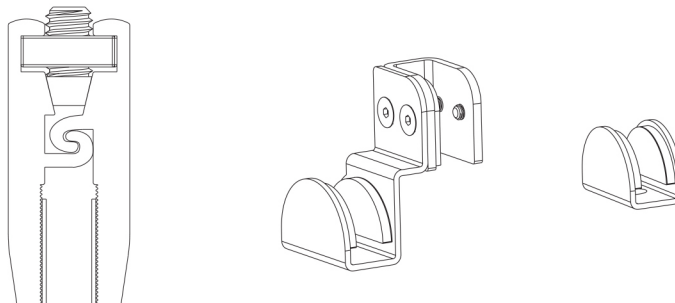


S10 - FOR PANELS WITH BREAK-OUT

Adapter kit includes:


- ☑ Adapter
- ☑ Track
- ☑ Runner on floor
- ☑ Full break-out system
- ☑ Accessories

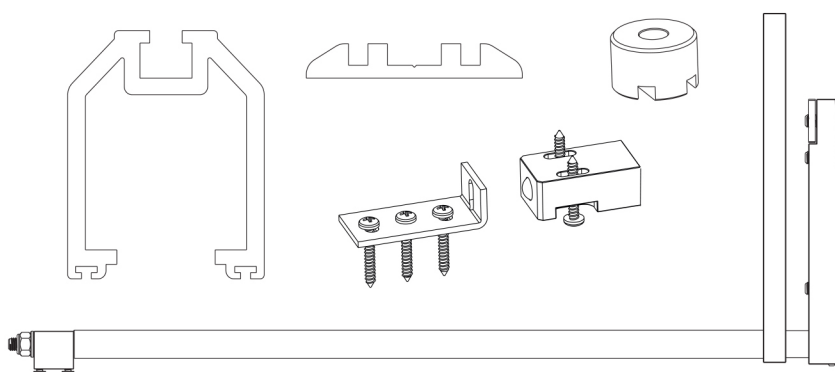

K200T - K280T DIMENSIONS

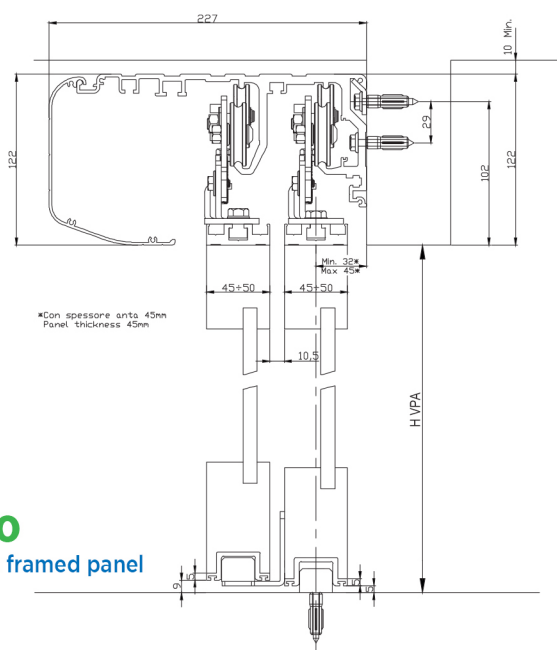

T10
with framed panel

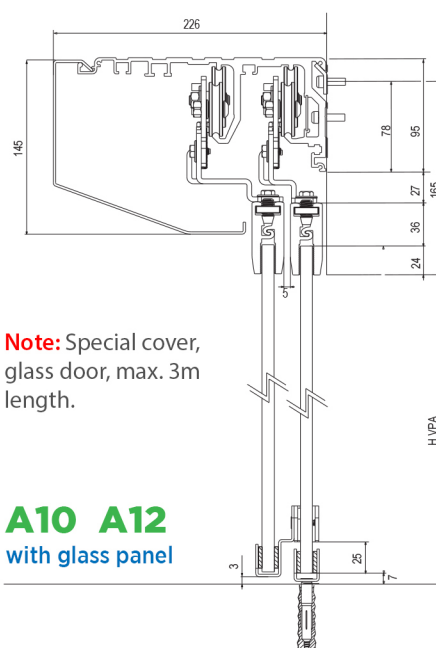

Note: Special cover,
glass door, max. 3m
length.

A10 A12
with glass panel